



# Dual Anchor Adjuster

INNOVATIVE DESIGNS FROM RACINE RAILROAD PRODUCTS



## RRP Design

Save time and anchor replacement cost by squeezing instead of hammering anchors in place.

The Dual Anchor Adjuster can squeeze all types of rail anchors used in a wood tie replacement crew. The DAA can re-tighten rail anchors in a surfacing operation, or during rail replacement in a quality control application.

Rail anchors do not have to be removed and reapplied during wood tie replacement operations, allowing for increased productivity and longer rail anchor life.

## Innovative Technology

- Programmable MD4 controlled automation has faster & smoother cycle times than previous RRP machines.
- Onboard electrical system diagnostics that simplify troubleshooting and lessen downtime.
- Remote program updates and remote troubleshooting with built-in telematics available.

## Easy Set-up and Operation

- Easy touchscreen controls for workhead adjustments are made inside the cab from the operator seat, saving time while keeping the operator in a safe environment.
- Auto and Manual operation modes.
- Reliable workhead design provides years of trouble-free service.

## Versatile

- In-cab adjustments align the workhead to accommodate rail height.
- Easy access to optional tools ensures a quick changeout for either 5", 5 1/2", or 6" rails on all anchor types throughout the head's 15" range.
- Squeeze two anchors on one rail or four anchors on two rails.
- Uniformly positioning anchors against tie or tie plates without twisting.
- Many components are interchangeable with the Dual Anchor Spreader [DAS].

**Video of the Dual Anchor Adjuster:** <https://tinyurl.com/mpn9sn3r>



# Dual Anchor Adjuster

INNOVATIVE DESIGNS FROM RACINE RAILROAD PRODUCTS




## Specifications

- Dimensions: 22'7" L x 8'5" W x 10'2" H
- Weight: 19,00 lbs
- Travel Speed: 25 MPH
- Engine: We offer a variety of engine packages to choose from, No DEF
- Fuel Capacity: 50 Gallons
- Hydraulic Reservoir: 58 Gallons (Case Drain Filter, Pressure Filter, & Return Filter options available)
- 24 volt system with circuit breakers for lights & accessories
- Seating Capacity: 1 operator & 2 passengers

## Features

- Excellent visibility of the work zone, increasing productivity and reducing wear on machine travel components.
- Machine has un-obstructed operator visibility fore and aft when track traveling.
- Cab: Enclosed Heat & A/C, full ergonomic seat with joystick controls, tinted safety glass for operator comfort.
- Various HVAC options to choose from.
- Multiple storage options for tools & equipment
- Two joystick controls to control each side of the workhead independently.
- Center H-Frame turntable that sets on the rails to manually rotate the machine as needed.
- Easy accessibility to workhead components to perform routine maintenance.

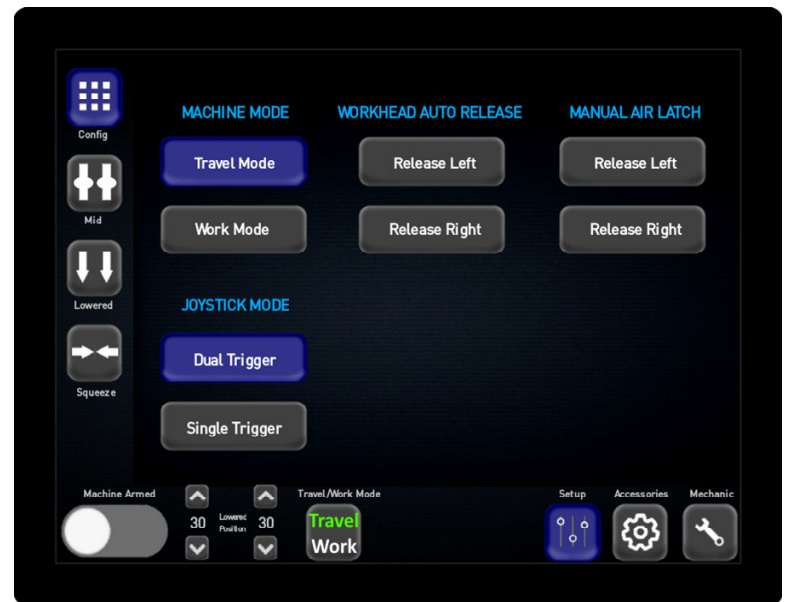

Operator Touchscreen Control Panel for Workhead Adjustment and Diagnostic Troubleshooting

For a complete list of specifications and machine options available, contact Racine Railroad Products, Inc. at:  
Tel (262) 637-9681 / email: [custserv@racinerailroad.com](mailto:custserv@racinerailroad.com)  
1955 Norwood Court Mount Pleasant, Wisconsin 53403

